



# TL-D Coloured

## TL-D 36W Red SLV

Tubular low-pressure mercury vapour discharge lamps with a tube wall internally coated with a white fluorescent powder to convert the UV radiation produced by the mercury gas discharge into visible light

### Product data

#### • General Characteristics

Cap-Base	G13
Bulb	T26
Main Application	-
Life to 50% failures	15000 hr
EM	

#### • Light Technical Characteristics

Color Code	15
Color Designation (text)	Red
Chromaticity Coordinate X	718 -
Chromaticity Coordinate Y	282 -
Luminous Flux Lamp EM	55 Lm
Lumen Maintenance 2000h	95 %
Lumen Maintenance 5000h	90 %

#### • Electrical Characteristics

Lamp Wattage	36 W
Lamp Wattage Technical	36 W
Lamp Voltage	103 V
Lamp Current	0.440 A
Dimmable	Yes

#### • Environmental Characteristics

Energy Efficiency Label (EEL)	G
Mercury (Hg) Content	13.0 mg

#### • Product Dimensions

Base Face to Base Face A	1199.4 (max) mm
Insertion Length B	1204.1 (min), 1206.5 (max) mm
Overall Length C	1213.6 (max) mm
Diameter D	28 (max) mm


#### • Product Data

Order code	928048501505
Full product code	928048501505
Full product name	TL-D 36W Red SLV
Order product name	TL-D 36W Red SLV/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500727480
Bar code on outerbox - EAN3	8711500727497
Logistic code(s) - 12NC	928048501505
Net weight per piece	138.400 gr


# PHILIPS

sense and simplicity



## Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D 36W/15	1199.4	1204.1	1206.5	1213.6	28



## Photometric data

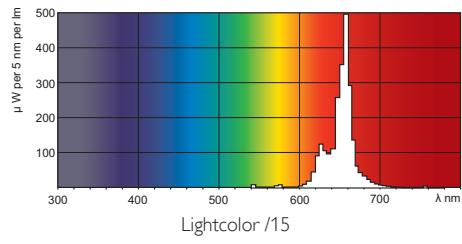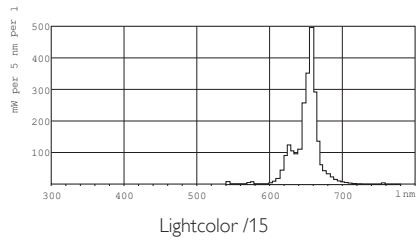

© 2011 Koninklijke Philips Electronics N.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2011, October 8  
data subject to change